
Technical Sheet


CLNC0G


Beklædningssøm 0° plastspole - Rundt hoved, ringformet skaft - HDG

Cladding nail is mainly used for painted facades. The length of the cladding nail is developed to not penetrate the wind shield/protection behind the facade and the flat head covers the opened wood fibre after insertion. The ring shank increase the withdrawal performance and the 60 degree diamond point prevents splitting.



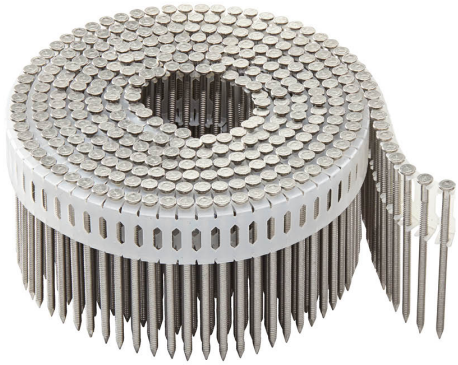





Features

Advantages

- Rundt hoved
- 60 graders diamantspids
- Ringformet skaft
- Plastspiral 0°

Applications

Support

- Cladding/facade wood to wood

CLNC0G

Beklædningssøm 0° plastspole - Rundt hoved, ringformet skaft - HDG

Teknisk data

Product dimensions

Reference	Dimensioner														
	Best. nr.	Andre				Dimensioner[mm]									
		DB nr.	NOBB nr.	Antal pr. kasse	Vægt[kg]	D[mm]	L[mm]	d_h[mm]	d1[mm]	A_h[mm]	h_t[mm]	lg[mm]	lp[mm]	tf_{ix}[mm]	bit[mm]
CLNC0G2.8X48	75759	2056106	55837664	1950.0	0.002	2.8	48	5.6	-	24.6	0.9	≥ 32	2.5	25.6	-
CLNC0G2.8X65	75760	2056107	55837653	1300.0	0.004	2.8	65	5.6	-	24.6	0.9	≥ 43	2.5	42.6	-

Product characteristic properties

Reference	Nail characteristic parameters					
	Produktets karakteristiske egenskaber					
	Bøjningsstyrke - $My,_k$[Nm]	Karakteristisk udtrækparameter - $f_{ax,k,90°}$[N/mm²]	Karakteristisk hoved gennemtrækparameter - $f_{head,k}$[N/mm²]	Karakteristisk trækstyrke - $f_{tens,k}$[kN]	* [Nm]	*
CLNC0G2.8X48	3.2	8.9	29.4	3.4	-	-
CLNC0G2.8X65	3.2	8.9	29.4	3.4	-	-

Simpson Strong-Tie
A/S
Egeskovvej 33 8700
Horsens
tel: +45 8781 7400
info@strongtie.dk

Copyright by Simpson Strong-Tie®
Oplysningerne i dette dokument ejes eksklusivt af Simpson Strong-Tie® A/S.
De er kun gældende i forbindelse med produkter, som forhandles af Simpson Strong-Tie®