
Technical Sheet


CLNC15G


Beklædningssøm 15° plastspole - Rundt hoved, ringformet skaft - HDG

Cladding nail is mainly used for painted facades. The length of the cladding nail is developed to not penetrate the wind shield/protection behind the facade and the flat head covers the opened wood fibre after insertion. The ring shank increase the withdrawal performance and the 60 degree diamond point prevents splitting.



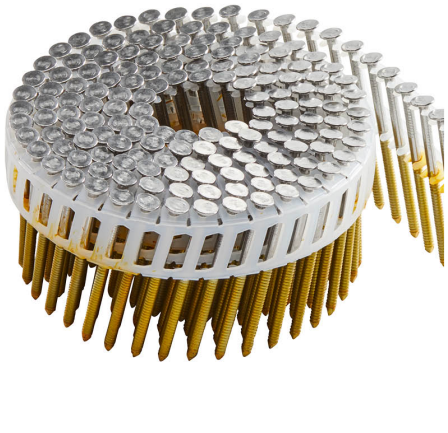





Features

Advantages

- Rundt hoved
- 60 graders diamantspids
- Ring skaft
- Plastspiral 15°

Applications

Support

- Cladding/facade wood to wood

CLNC15G

Beklædningssøm 15° plastspole - Rundt hoved, ringformet skaft - HDG

Teknisk data

Product dimensions

Reference	Dimensioner													
	Best. nr.	Andre			Dimensioner[mm]									
		DB nr.	NOBB nr.	Vægt[kg]	D[mm]	L[mm]	d_h[mm]	d1[mm]	A_h[mm]	h_t[mm]	lg[mm]	lp[mm]	tf_{ix}[mm]	bit[mm]
CLNC15G2.5X65	75739	2056086	55837600	0.003	2.5	63.5	6.7	-	35.3	0.5	50	2.2	43.5	-
CLNC15G2.8X48	75740	2056087	55837581	0.002	2.8	47	6.9	-	36.6	0.6	24	2.5	24.6	-
CLNC15G2.8X65	75741	2056088	55837596	0.004	2.8	63.5	6.9	-	36.6	0.6	50	2.5	41.1	-
CLNC15G2.8X75	75742	2056089	55837615	0.005	2.8	73.5	6.9	-	36.6	0.6	53	2.5	51.1	-

Product characteristic properties

Reference	Nail characteristic parameters					
	Produktets karakteristiske egenskaber					
	Bøjningsstyrke - $My,_k$[Nm]	Karakteristisk udtrækparameter - $f_{ax,k,90°}$[N/mm²]	Karakteristisk hoved gennemtrækparameter - $f_{head,k}$[N/mm²]	Karakteristisk trækstyrke - $f_{tens,k}$[kN]	* [Nm]	*
CLNC15G2.5X65	2	5.1	22	3	-	-
CLNC15G2.8X48	3.2	8.9	29.4	3.4	-	-
CLNC15G2.8X65	3.2	8.9	29.4	3.4	-	-
CLNC15G2.8X75	3.2	8.9	29.4	3.4	-	-

Copyright by Simpson Strong-Tie®
Oplysningerne i dette dokument ejes eksklusivt af Simpson Strong-Tie® A/S.
De er kun gældende i forbindelse med produkter, som forhandles af Simpson Strong-Tie®