
Technical Sheet


CLNC15A4

Beklædningssøm 15° plastspole - Rundt hoved, ringformet skaft - Rustfri A4

Cladding nail is mainly used for painted facades. The length of the cladding nail is developed to not penetrate the wind shield/protection behind the facade and the flat head covers the opened wood fibre after insertion. The ring shank increase the withdrawal performance and the 60 degree diamond point prevents splitting.



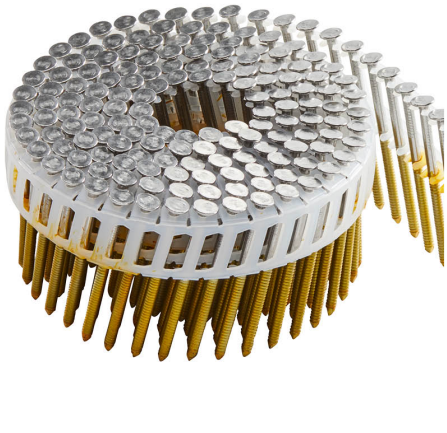





Features

Advantages

- Rundt hoved
- 60 graders diamantspids
- Ring skaft
- Plastspiral 15°

Applications

Support

- Cladding/facade wood to wood

CLNC15A4

Beklædningssøm 15° plastspole - Rundt hoved, ringformet skaft - Rustfri A4

Teknisk data

Product dimensions

Reference	Dimensioner														
	Best. nr.	Andre				Dimensioner[mm]									
		DB nr.	NOBB nr.	Antal pr. kasse	Vægt[kg]	D[mm]	L[mm]	d_h[mm]	d1[mm]	A_h[mm]	h_t[mm]	lg[mm]	lp[mm]	tf_{ix}[mm]	bit[mm
CLNC15A42.8X48	75743	2056090	55837626	2100.0	0.003	2.8	47	6.9	-	36.6	0.6	26	2.5	24.6	-
CLNC15A42.8X65	75744	2056091	55842394	1400.0	0.004	2.8	63.5	6.9	-	36.6	0.6	50	2.5	41.1	-
CLNC15A42.8X75	75745	2056092	55837634	1400.0	0.004	2.8	73.5	6.9	-	36.6	0.6	53	2.5	51.1	-

Product characteristic properties

Reference	Nail characteristic parameters					
	Produktets karakteristiske egenskaber					
	Bøjningsstyrke - $My,_k$[Nm]	Karakteristisk udtrækparameter - $f_{ax,k,90°}$[N/mm²]	Karakteristisk hoved gennemtrækparameter - $f_{head,k}$[N/mm²]	Karakteristisk trækstyrke - $f_{tens,k}$[kN]	* [Nm]	*
CLNC15A42.8X48	3.2	8.9	29.4	3.4	-	-
CLNC15A42.8X65	3.2	8.9	29.4	3.4	-	-
CLNC15A42.8X75	3.2	8.9	29.4	3.4	-	-

Simpson Strong-Tie
A/S
Egeskovvej 33
8700 Horsens
tel: +45 8781 7400
info@strongtie.dk

Copyright by Simpson Strong-Tie®
Oplysningerne i dette dokument ejes eksklusivt af Simpson Strong-Tie® A/S.
De er kun gældende i forbindelse med produkter, som forhandles af Simpson Strong-Tie® A/S.